


Jaw Couplings	Bore		Outside Diameter OD	Overall Length OAL	Gap G	Set Screw T	Weight lbs.
	Min.	Max.					
PL050	1/4	5/8	1.08	1.71	0.48	1/4-20	0.3
PL070	1/4	3/4	1.36	1.98	0.48	1/4-20	0.6
PL075	1/4	7/8	1.75	2.13	0.50	1/4-20	1.0
PL090	1/4	1	2.11	2.15	0.52	1/4-20	1.5
PL095	7/16	1 1/8	2.11	2.51	0.52	5/16-18	1.8
PL099	7/16	1 3/16	2.54	2.84	0.71	5/16-18	2.5
PL100	7/16	1 3/8	2.54	3.48	0.71	5/16-18	3.2
PL110	5/8	1 5/8	3.32	4.22	0.88	3/8-16	6.6
PL150	5/8	1 7/8	3.75	4.50	1.00	3/8-16	8.8
PL190	3/4	2 1/8	4.50	4.86	1.00	1/2-13	15.3
PL225	3/4	2 5/8	5.00	5.34	1.00	1/2-13	19.6

*Dimensional Data - Inch/Lbs.

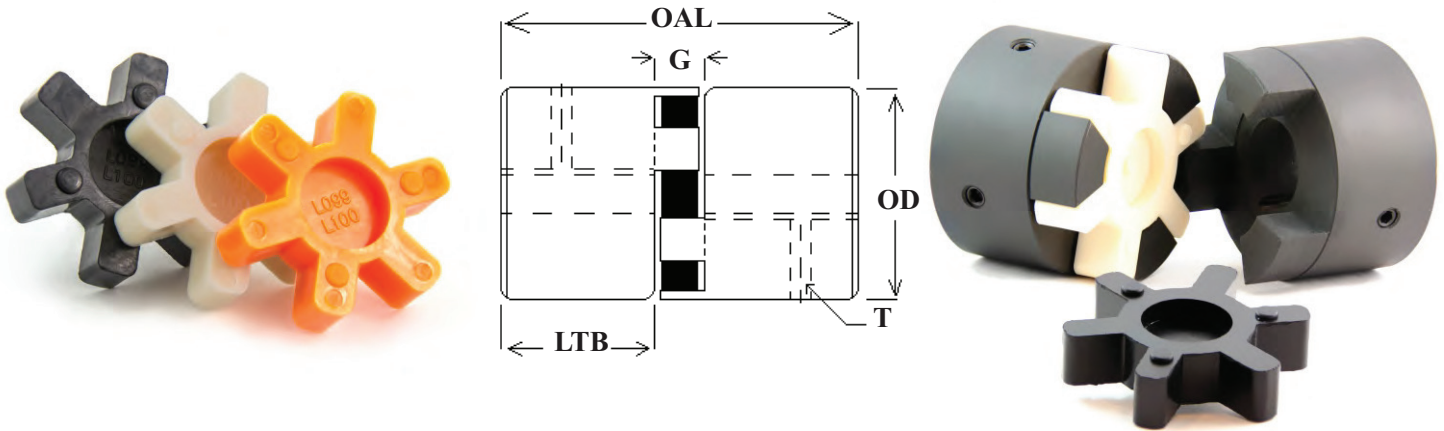

Jaw Coupling Torque & Horsepower Ratings

Jaw Coupling	Torque Rating (lb.-in.)			Buna -N HP Capacity at different RPM				
	Buna -N	Urethane	Hytrel	100	300	1200	1800	3600
PL050	26	39	50	0.05	0.15	0.60	0.90	1.80
PL070	43	65	114	0.07	0.21	0.84	1.20	2.50
PL075	90	135	227	0.13	0.39	1.56	2.30	4.70
PL090	140	215	401	0.22	0.66	2.64	4.00	7.90
PL095	195	290	560	0.30	0.90	3.60	5.40	10.80
PL099	315	477	792	0.46	1.40	5.50	8.30	16.60
PL100	415	620	1100	0.66	2.00	7.90	11.90	23.80
PL110	790	1180	2270	1.20	3.60	14.40	21.60	43.20
PL150	1200	1850	3700	1.90	5.70	22.80	34.20	68.40
PL190	1700	2590	4650	2.40	7.20	28.80	43.20	86.40
PL225	2340	3510	6230	3.60	10.80	43.20	64.80	129.60

*Above HP capacities are for the Buna -N rubber spider & service factor of 1, when using Urethane multiply capacities by 1.5, and when using Hytrel spiders multiply capacities by 2.5.