

# No. D 40

1/2 PITCH, NOMINAL 0.275"



## Double - Type B

between the teeth = 0.841"


Part No.	No. of Teeth	Diameters		Bore		Hub		Wgt. Lbs.
		Outside	Pitch	Stock	Max	Dia.	L.T.B.	
D40B11H	11	2.000	1.775	1/2	3/4	1 7/16*	1 1/2	0.62
D40B12H	12	2.170	1.932	1/2	15/16	1 9/16*	1 1/2	0.76
D40B13H	13	2.330	2.089	1/2	1	1 1/2	1 1/2	0.86
D40B14H	14	2.490	2.247	1/2	1 1/8	1 11/16	1 1/2	1.08
D40B15H	15	2.650	2.405	1/2	1 1/4	1 13/16	1 1/2	1.24
D40B16H	16	2.810	2.563	5/8	1 3/8	2	1 1/2	1.42
D40B17H	17	2.980	2.721	5/8	1 7/16	2 1/8	1 1/2	1.64
D40B18H	18	3.140	2.879	5/8	1 1/2	2 5/16	1 1/2	1.92
D40B19H	19	3.300	3.038	5/8	1 3/4	2 1/2	1 1/2	2.22
D40B20H	20	3.460	3.196	5/8	1 7/8	2 5/8	1 5/8	2.64
D40B21H	21	3.620	3.355	5/8	1 7/8	2 3/4	1 5/8	2.94
D40B22H	22	3.780	3.513	5/8	1 7/8	2 7/8	1 5/8	3.18
D40B23H	23	3.940	3.672	5/8	2	3	1 5/8	3.52
D40B24H	24	4.100	3.831	5/8	2 1/4	3 1/4	1 5/8	4.04
D40B25H	25	4.260	3.989	5/8	2 1/4	3 1/4	1 5/8	4.26
D40B26H	26	4.420	4.148	5/8	2 1/4	3 1/4	1 5/8	4.48
D40B27H	27	4.580	4.307	5/8	2 1/4	3 1/4	1 5/8	4.62
D40B28H	28	4.740	4.466	5/8	2 1/4	3	1 5/8	4.86
D40B29H	29	4.900	4.670	5/8	2 1/4	3 1/4	1 5/8	5.18
D40B30H	30	5.060	4.873	7/8	2 1/4	3 1/4	1 5/8	5.34
D40B35H	35	5.860	5.578	7/8	2 1/4	3 1/4	1 5/8	6.80
D40B36H	36	6.020	5.737	15/16	2 1/2	3 3/4	1 5/8	7.20
D40B40H	40	6.650	6.373	15/16	2 1/2	3 3/4	1 3/4	9.40
D40B42	42	6.970	6.691	15/16	2 1/2	3 3/4	1 3/4	10.20
D40B45	45	7.450	7.168	15/16	3	4	1 3/4	11.36
D40B48	48	7.930	7.645	15/16	2 1/2	3 3/4	1 3/4	12.66
D40B54	54	8.890	8.599	15/16	2 1/2	3 3/4	1 3/4	15.48
D40B60	60	9.840	9.554	15/16	2 1/2	3 3/4	1 3/4	18.60
D40B72	72	11.750	11.463	1 3/16	2 3/4	4 1/4	2 1/8	27.88
D40B84	84	13.660	13.372	1 3/16	2 3/4	4	2 1/8	36.24
D40B96	96	15.570	15.281	1 3/16	2 3/4	4 1/4	2 1/8	39.50



## Double Single - Type A

Nominal = 0.284"

Part No.	No. of Teeth	Outside Dia.	Bore		Dimensions			Wgt. Lbs.
			Min.	Max.	L	C	E	
DS40A15H	15	2.650	0.500	1 1/4	1 13/32	1 1/8	1 13/16	1.20
DS40A16H	16	2.810	0.500	1 1/4	1 13/32	1 1/8	2	1.40
DS40A17H	17	2.980	0.500	1 5/16	1 13/32	1 1/8	2 1/8	1.60
DS40A18H	18	3.140	0.500	1 1/2	1 13/32	1 1/8	2 5/16	1.80
DS40A19H	19	3.300	0.625	1 11/16	1 13/32	1 1/8	2 1/2	2.20
DS40A20H	20	3.460	0.625	1 3/4	1 13/32	1 1/8	2 5/8	2.60
DS40A21H	21	3.620	0.625	1 3/4	1 13/32	1 1/8	2 25/32	2.90
DS40A22H	22	3.780	0.625	1 13/16	1 13/32	1 1/8	2 15/16	3.00
DS40A23H	23	3.940	0.625	2 1/16	1 13/32	1 1/8	3 3/32	3.50
DS40A24H	24	4.100	0.625	2 1/4	1 13/32	1 1/8	3 17/64	4.00

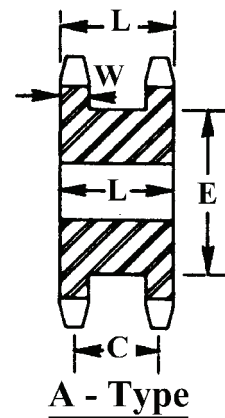

Maximum bores shown will accommodate standard keyseat & setscrew over keyseat. Slightly larger bores are possible with no keyseat, shallow keyseat, or setscrew at an angle to keyseat.