

No. **140** ST

1-3/4 PITCH, NOMINAL 0.924"




Single - Split Taper Sprockets - With Hardened Teeth

Part No.	No. of Teeth	Diameters		Wgt. Lbs.
		Outside	Pitch	
140Q11H	11	7.010	6.212	6.40
140Q12H	12	7.580	6.762	9.00
140R13H	13	8.150	7.313	11.10
140R14H	14	8.720	7.864	12.60
140R15H	15	9.280	8.417	14.70
140R16H	16	9.850	8.970	16.50
140R17H	17	10.410	9.524	18.50
140R18H	18	10.970	10.078	20.50
140R19H	19	11.540	10.632	23.00
140R20H	20	12.100	11.187	25.40
140R21H	21	12.660	11.742	27.80
140R22*	22	13.220	12.297	27.80
140R23*	23	13.780	12.852	32.50
140R24*	24	14.340	13.407	36.00
140R25*	25	14.900	13.963	37.60
140R26*	26	15.460	14.513	40.30




* Sprkts with Q, R indicates Q1, R1 bushings should be used, Q1 max. bore 2-11/16 & R1 max. bore 3-3/4.


* Indicates that bushings are reversed when assembled.

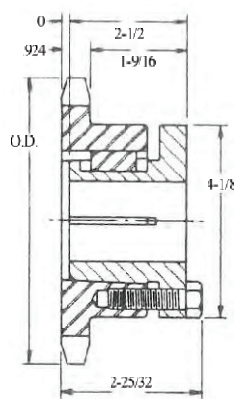

#140 Q1 Bushing

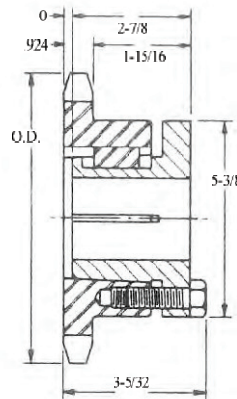

#140 R1 Bushing

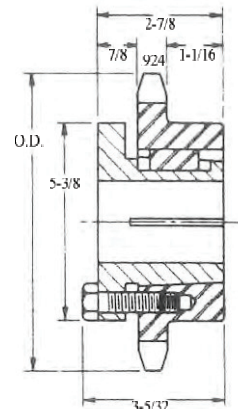

*140 R1 Bushing